

# Mini Fold / Mini Glide / LOSCA Door II / LOSCA A

Door Package

## Mini Fold




Small automatic folding door to make the best use of a limited space

- Achieving such a smooth operation as a sliding door, the door provides comfortable passage.
- The folding door can open wide in a limited space and does not need door pockets.
- The pinch guard structure around the door hinge enhances safety.



Door Type	4 leaves	2 leaves
Applicable Door Width : DW (mm)	1000~1800	
Applicable Door Height : DH (mm)	2400 or less	
Applicable Entrance Height w / o Fanlight (mm)	H +170	
Applicable Entrance Height with Fanlight (mm)	4000 or less	
Frame Depth (mm)	100	
Operator Box Size HW (mm)	100×170	
Frame / Door Material	Aluminum (White / Black / Silver / Bronze / Stainless) Stainless steel (Hair line finish / Mirror finish)	
Applicable Glass Thickness (mm)	3, 4, 5, 6, 6.8 (wired glass)	
Average Door Operation Spd (m / sec)	0.4 or less	
Power Supply	100V AC · 5A	
Maximum Endurance Wind Speed (m / sec)	10 or less (for outdoor use) 7 or less (for interior use)	

### Dimension(mm)

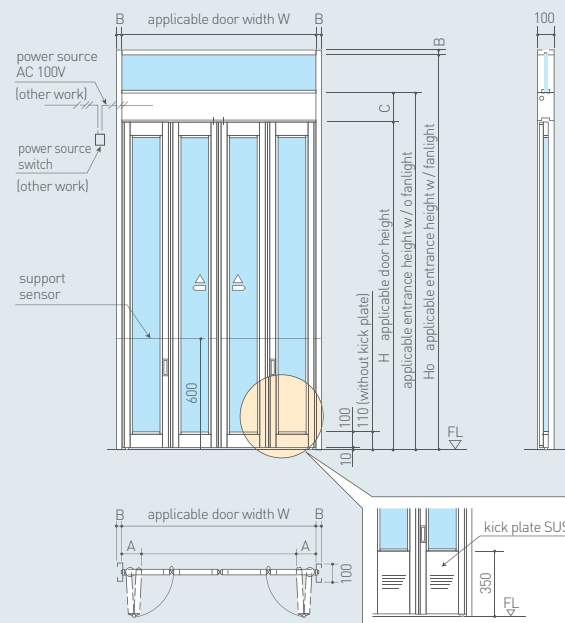

	A	B	C
aluminum sash	120~130	30	170
stainless sash	140	30	200

Door Package

## Mini Glide




Small automatic gliding door that has limited opening space but enables smooth passage

- The motion of the door, which does not disturb the flow of people, offers comfortable passage in a narrow corridor.
- The simple appearance like a swing door provides a feeling of serenity.
- Barrier-free without guide rail can be selectable for indoor use.



Door Type	Double glide	Single glide
Applicable Door Width : DW (mm)	1000~1800	800~900
Applicable Door Height : DH (mm)	2400 or less	
Applicable Entrance Height w / o Fanlight (mm)	H +170	
Applicable Entrance Height with Fanlight (mm)	4000 or less	
Frame Depth (mm)	100	
Operator Box Size HW (mm)	100×170	
Frame / Door Material	Aluminum (White / Black / Silver / Bronze / Stainless) Stainless steel (Hair line finish / Mirror finish)	
Applicable Glass Thickness (mm)	3, 4, 5, 6, 6.8 (wired glass)	
Average Door Operation Spd (m / sec)	0.4 or less	
Power Supply	100V AC · 5A	
Maximum Endurance Wind Speed (m / sec)	10 or less (for outdoor use) 7 or less (for interior use)	

### Dimension(mm)

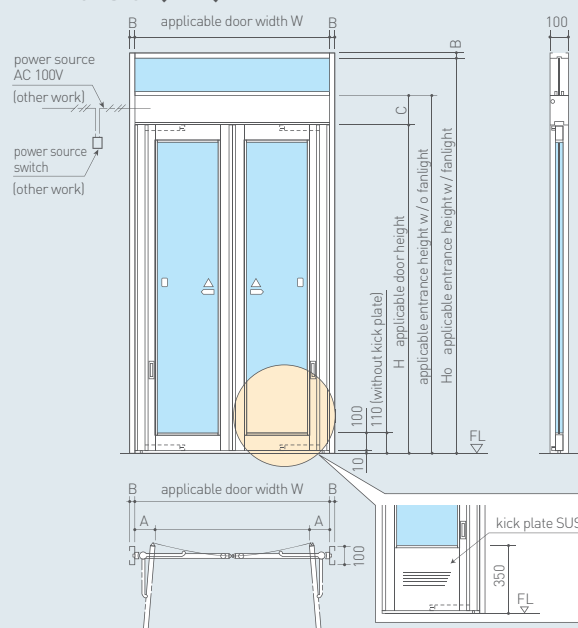

	A	B	C
aluminum sash	132~157	30	170
stainless sash	141~162	30	200