

A SAFE AND CONVENIENT WORLD, A WORLD WHERE
TECHNOLOGY AND INNOVATION BECOME ONE.



Sliding Automatic Door



Telescopic Automatic Door



Panic Automatic Door



Folding Automatic Door



Swing Automatic Door



Insulation Automatic Door



www.autodoortech.com

Automatic Door System
SWICO | 신일자동문
SINIL AUTO DOOR
www.autodoortech.com

- The color of the product may differ slightly from the actual product due to the printing process.
- The appearance and specifications of the product may be changed without prior notice for product improvement.



www.autodoortech.com

Automatic Door System
SWICO

SWICO CO.,LTD | SINILAUTODOOR

SLIDING OPERATOR SD-60

SD60 is easy and simple to install using the bracket fixation method, and operates smoothly and quietly. Management is convenient as status and errors can be easily checked through the LCD window. Application: Apartments, terminals, discount stores, convenience stores, offices, banks, department stores, hospitals, hotels, restaurants, stores, pharmacies, etc.

LCD digital display (Controller)

Status and errors are easily displayed in real time through a digital LCD window, and various settings are possible.

Terminal Board


It is equipped with a variety of input ports, has separate 24V and 12V output terminals, and has a lamp indicator to check the power status.

Switching power (SMPS)

It supplies power stably using switching power (SMPS).

Motor

By adopting a DC motor with an integrated reducer, it has low noise, no minor breakdowns, and excellent durability. Powerful power enables quick opening and closing and comfortable entry and exit.

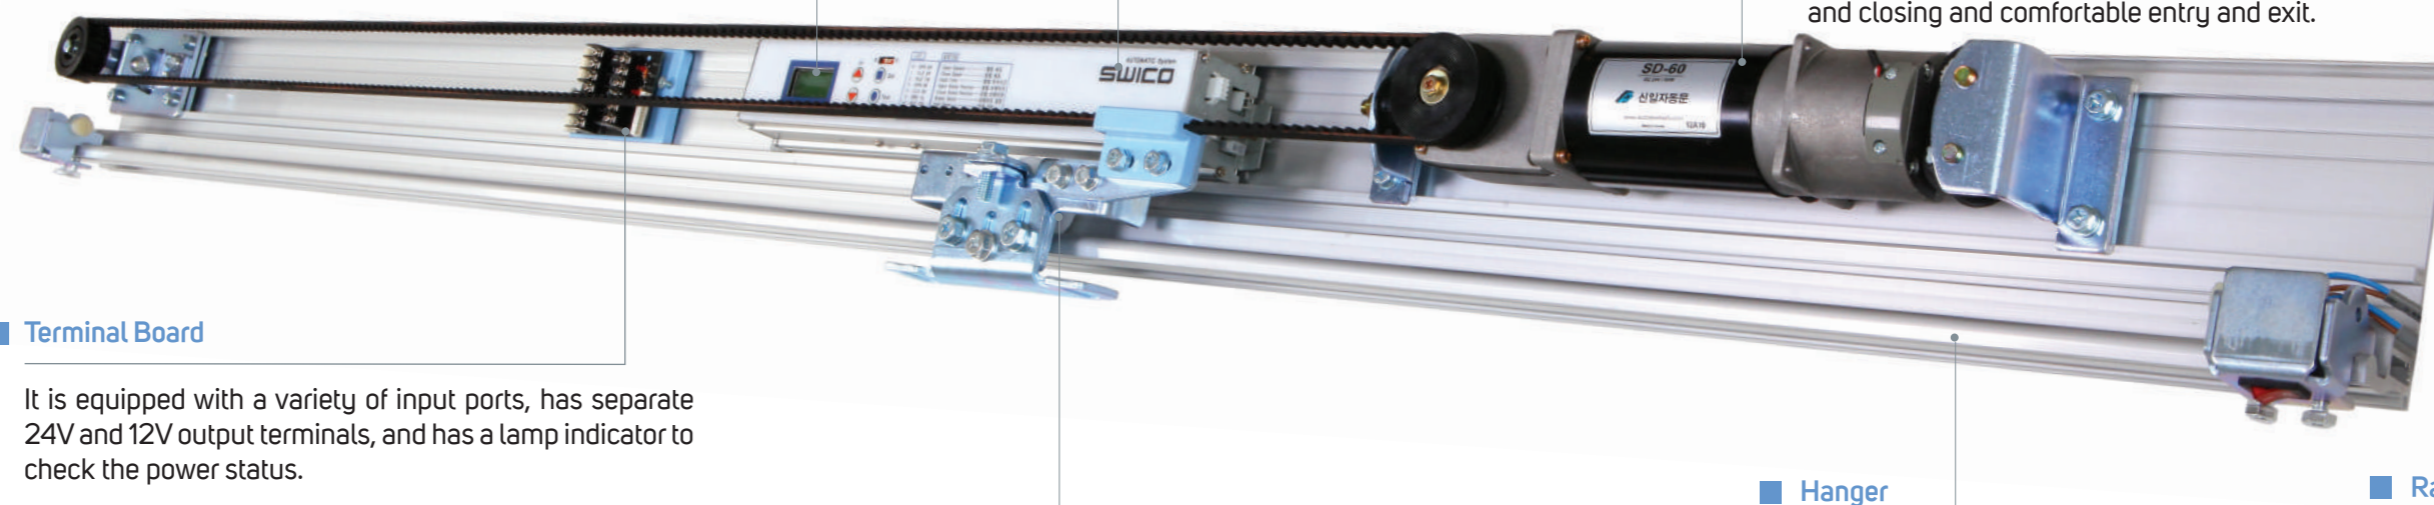

Hanger

It is made of sturdy acetal material and uses two overlapping bearings inside the roller, making it strong against load and running stably.

Rail

It is made of aluminum 6063, which has excellent hardness and corrosion resistance, and has a structure that is strong against load.

OPTION



SPEC

Model name	SD-60
Controller	8bit Micro Computer / SMPS / LCD Display
Opening speed	200~500 mm/sec
Hold open time	0~10sec
Door weight (single)	Max 120Kg
Door weight (bi-parting)	Max 100Kg X 2
Box Size	110mm(w) x 200mm(h) / 100mm(w) x 200mm(h)
Operation temperature	-20°C ~ 50°C
Power supply	AC 180~230V 50/60Hz